




Connectors

Connector Standard Ceramic Jab-in

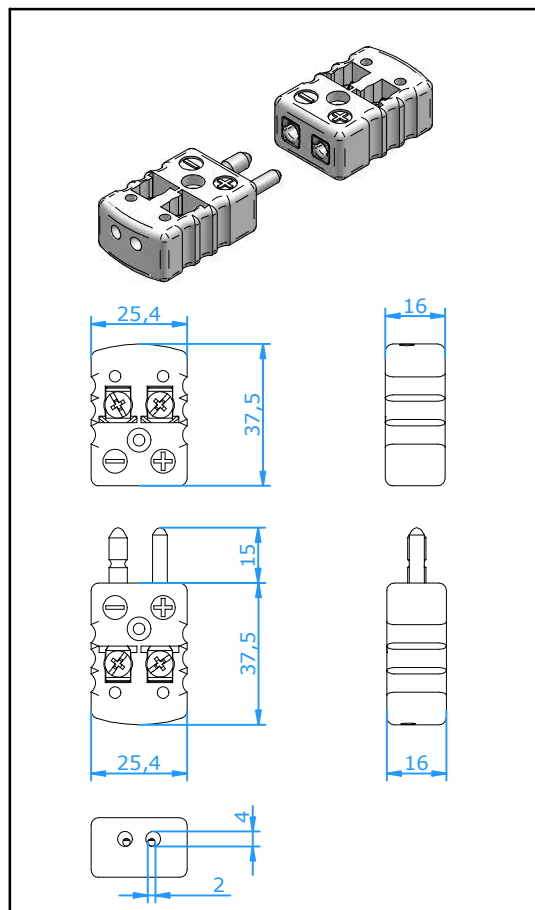

Application

Connector for thermocouple and RTD circuits. Allows easy connection without need for cover removal. Solid pin design ensures good contact even in demanding applications. Hollow pin design offers a good quality product at competitive pricing for less frequently used connectors.

Construction

- Ceramic body with original thermocouple material pins and springloaded inserts.
- Rugged one body design
- Polarized pins
- Easy wire connection through sandwich construction
- Molded barriers prevent short circuit
- High purity alumina body material

Wire size

- Accepts wires up to 1,6 mm.

Temperature rating

- 650 °C Max.

Color Code

- Body color white with color dot. Body without colour dot available on request.

Accessories

- Wire clamp bracket, see separate specification sheet.

Ordering Code Plug Solid Pin : CSPCQ-xx
Plug Hollow Pin: CSPCQL-xx
Jack : CSJQ-xx

For last two digits 'xx' see table below

Calibration Code Compensation material for	E	J	K	N	T	U	R/S Pt13Rh/ Pt Cu	C W5Re/ W26Re CPX CNX	B Pt6Rh/ Pt30Rh Cu ¹ Cu ¹
Material Positive	NiCr	Fe	NiCr	NiCrSi	Cu	Cu ¹	Cu	CPX	Cu ¹
Material Negative	CuNi	CuNi	NiAl	NiSi	CuNi	Cu ¹	Alloy #11	CNX	Cu ¹
IEC Color Code									
Color Dot	Violet	Black	Green	Pink	Brown	White	Orange	Red	Grey
Code	EI	JI	KI	NI	TI	UI	RI	C ²	BI
ANSI Color Code									
Color Dot	Violet	Black	Yellow	Orange	Blue	White	Green	Red	Grey
Code	EI	JI	KA	NA	TA	UI	RA	C ²	BI
DIN Color Code									
Color Dot		Blue	Green		Brown		White		Grey
Code		JD	KI		TI		RD		BI

Note: - Contacts with a hard nickel- or gold-plating are available, please add "NP" or "GP" after the calibration code
- Type C connector plug is only available in a hollow pin version