


MPS-33 series



- -0.1 ~ 1.0 MPa
: -101.3kPa
: -0.1 ~ 1MPa
: -101 ~ 500kPa
- Set Key UP,DOWN Key 가
- , (), (1 ~ 5V)
- IP65

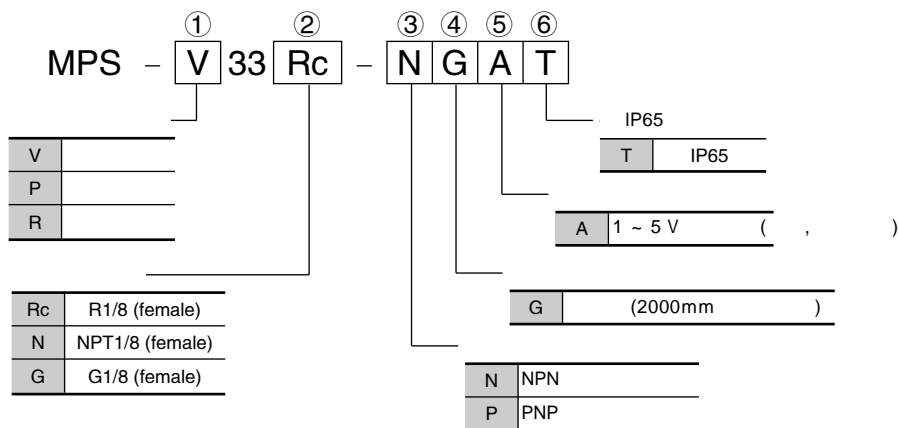

MPS-ACCH8
(2)



L3, F3
MPS-ACCK8
L3 , F3 (M4, 2)



		MPS-V33	MPS-P33	MPS-R33
		(,)		
		*1)		
	kPa	-101.0 ~ 0kPa	-0.1 ~ 1MPa	-101 ~ 500kPa
	MPa	0.3	1.5	0.8
	°C	0 ~ 50		
	%	35 ~ 85 RH ()		
		Rc1/8(female)、NPT1/8(female)、G1/8(female)		
	V	DC12 ~ 24 ± 10%、 (Vp-p) 10%		
	mA	55mA		
		NPN	PNP	2
	mA	max.80mA		
()	V	DC1 ~ 5 (± 0.1%), linearity less than ± 0.5% of F.S., output impedance 1kΩ*2)		
	%	± 0.2 F.S., 1digit or less		
		Less than ± 2% of F.S. (At standard temperature 25°C, range 0 ~ 50°C)		
	ms	Less than 2.5 (Variable 24, 192, 768 options)		
		가		
		3 1/2 digits 7 segments, 1 color (Red) LCD		
		0.1kPa	0.001MPa	1kPa
		IP65		
		10 ~ 55Hz, total amplitude 1.5mm (2 hours in direction of XYZ)		
	m/s ²	980 (3 times in direction of XYZ)		
		Grommet		
		φ4 0.15mm ² 5 lead wires 2000mm		
		*3)		
	g	105 (with lead wire)		

1) Non grease

가

grease



2) (P)





0 ~ 1MPa

, DC 1 ~ 5V

. -0.1 ~ 0

3)

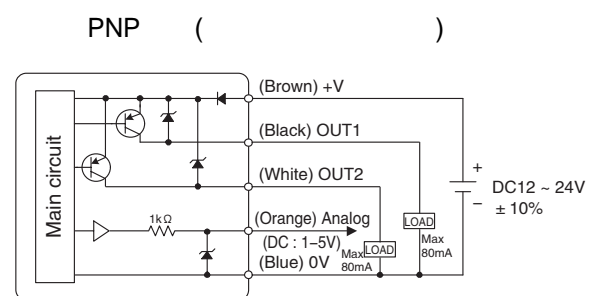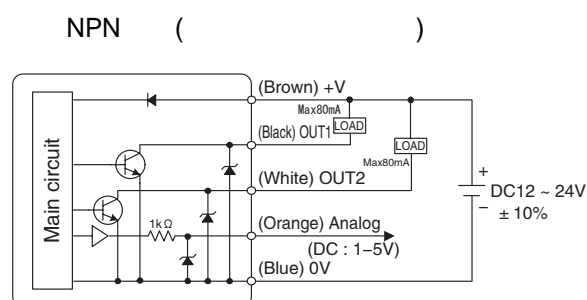

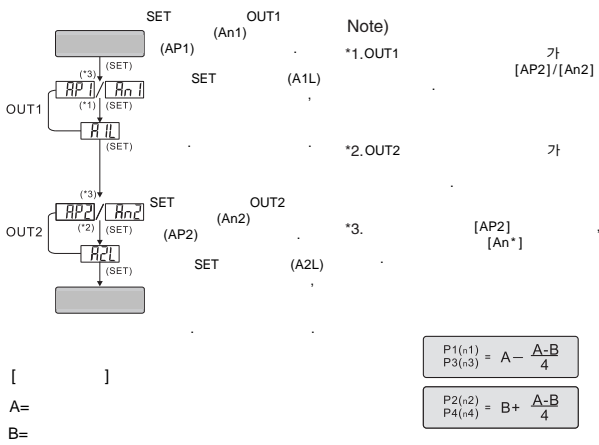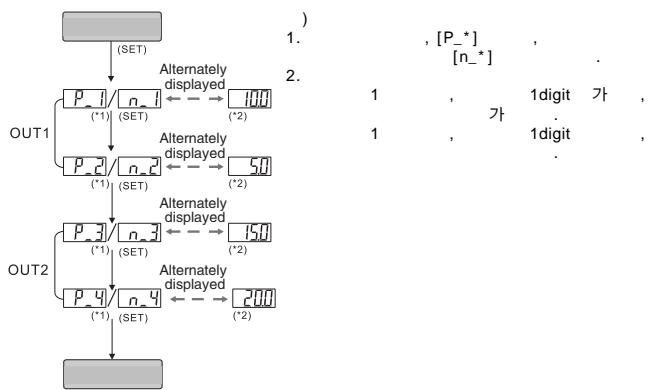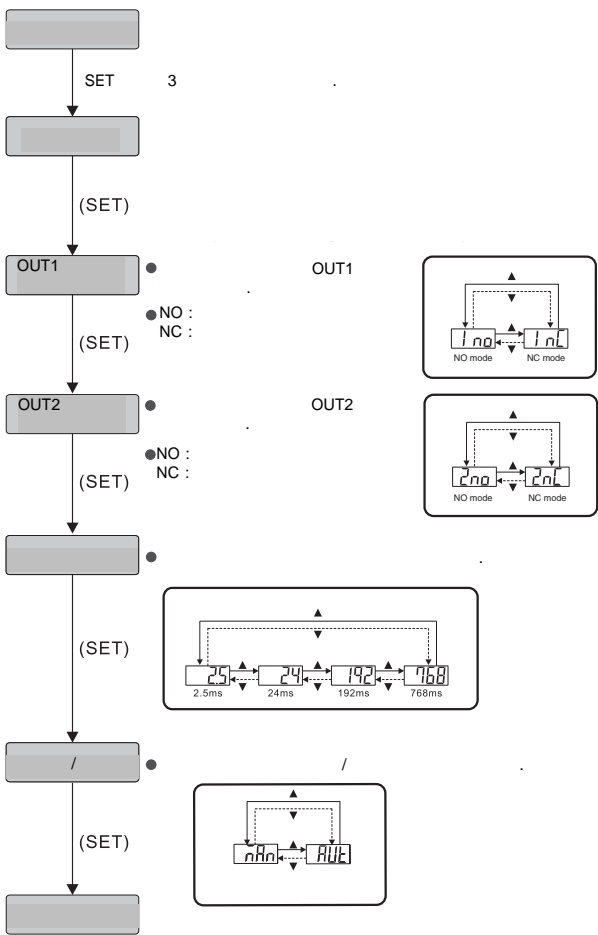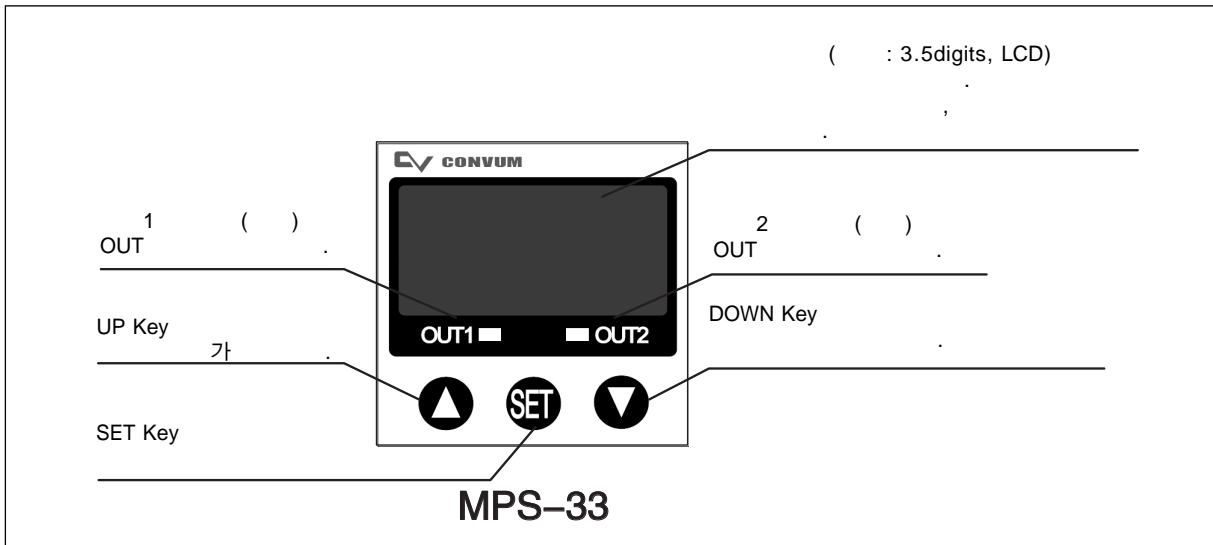


①


Key

[00]


②

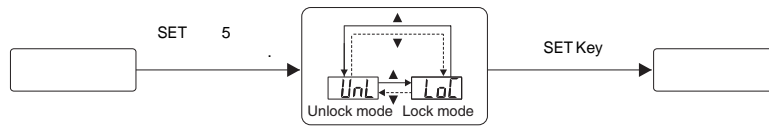


(mm)

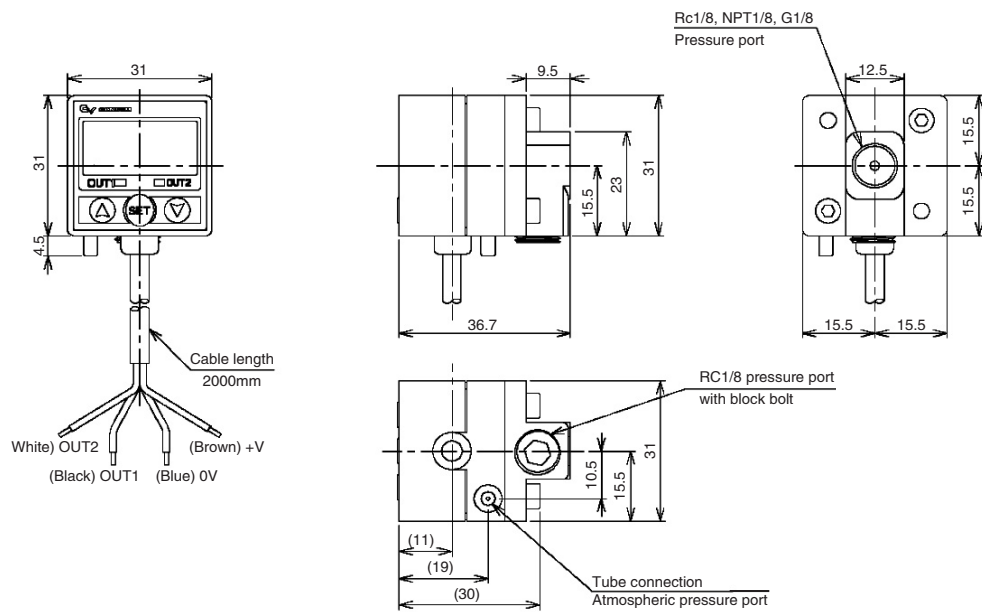


L3 bracket fitting

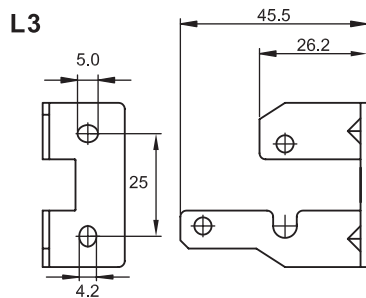

F3 bracket fitting

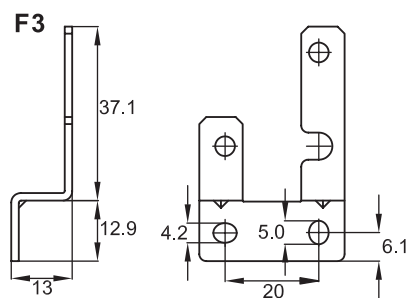

Surface panel mounting

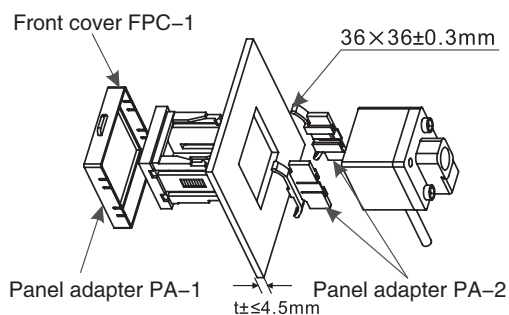

Atmospheric air connection port

