

PA 11 B 403T

Photoelectric Amplifiers

Standard, Remote Photoelectric Systems



Product Data

Supply Voltage:	24 V dc
Housing:	11-pole DIN socket
Sensing Range:	70 m
Sensitivity Adjustment:	Manual
Timer:	-
Output:	NPN/PNP

Technical Data

Supply Voltage:	24 V dc
Current Consumption:	Max. 3,5 VA
Housing Material:	Noryl
Power On Indicator:	Green LED
Output Indicator:	Yellow LED
Hysteresis:	Approx. 45 %
Voltage Tolerance:	+/- 15 %
Output, Relay:	-
Output, Transistor:	60 mA / 30 V dc
LR Sensor Failure Indicator:	Red LED
LT Sensor Failure Indicator:	Red LED
Sensor Monitor LED Drive:	Green LED on the receiver: 'Power ON' Yellow LED on the transmitter: PA 11 output activated
Response Time ton / toff, Relay:	-
Response Time ton / toff, Transistor:	25 ms / 25 ms
Signal Level Indicator:	Green LED
Operation Frequency, Relay:	-
Operation Frequency, Transistor:	20 Hz
Delay Time ton / toff:	-
Alarm Output:	-


Environmental Data

Operation Temperature:	– 10 to +50 °C
Storage Temperature:	– 40 to +80 °C
Sealing Class:	IP 40

Approvals



Wiring Diagram

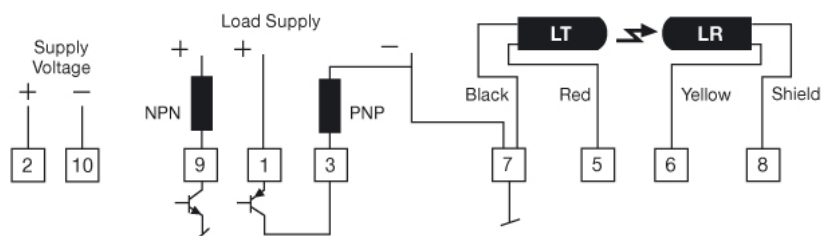

Transistor output

Dimensions

