


## VB1U series

(Both UNILOK Tube Fittings)

- Max Operating Pressure  
1000psig (69bar) at 38°C(100°F) with PTFE seat  
1000psig(69bar) at 170°C(338°F) with PEEK seat
- Connection Type  
Both UNILOK tube fittings
- Handle Type  
Lever, Butterfly and Bar

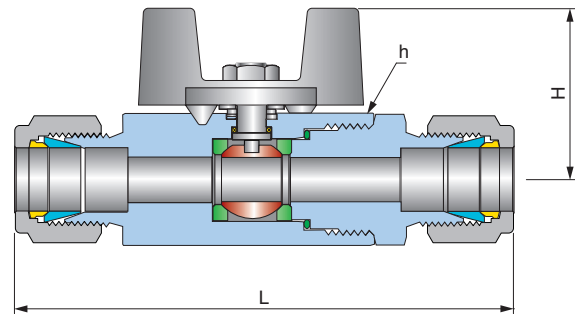

### Ordering Information & Dimensions

Part No.		End Connections		Orifice	Dimensions (mm)		
		Inlet	Outlet		h(Hex)	L	H
VB11	U-04T-	1/4" UNILOK		5.0	17.46	79.0	26.5
	U-M06T-	6mm UNILOK				82.0	
	U-M08T-	8mm UNILOK					
VB12	U-06T-	3/8" UNILOK		7.5	22.22	89.5	32.5
	U-M10T-	10mm UNILOK					
VB13	U-08T-	1/2" UNILOK		9.0	26.98	101.6	35.0
	U-M12T-	12mm UNILOK					
VB14	U-12T-	3/4" UNILOK		12.5	31.75	107.5	37.5
VB15	U-16T-	1" UNILOK		16.0	38.10	132.6	44.5
	U-M25T-	25mm UNILOK					

Dimensions are for reference only and are subject to change without prior notice.